

# Warranty

The PorterRack is guaranteed to be free from manufacturing defects for one (1) year from the original date of purchase.

Defective products will be repaired or replaced at Xtracycle's discretion. To determine if a warranty claim is valid you may be required to return the product to Xtracycle for inspection. Xtracycle is not responsible for removal, installation or shipping costs. This warranty applies only to the original buyer and is not transferable.

This warranty does not cover damage from use of this product outside of its intended range or that resulting from modification or neglect. It also does not cover wear and tear resulting from the normal use of the product.

# XTRACYCLE

## PorterRack

Carry almost anything!

For EdgeRunners with rack mounting points on the head tube.



### What's Included:

- 1 PorterRack
- 4 M8 Button Head Bolts
- 4 Locking Washers
- 4 M8 Nyloc Nuts
- 4 Spacers

### Tools Needed:

5mm Allen Wrench

[www.xtracycle.com](http://www.xtracycle.com)

### Our mission:

To empower people with transformational tools that move the body and spirit.

[www.xtracycle.com](http://www.xtracycle.com)



REV2





**Step 1:** Determine the appropriate mounting holes for your PorterRack by holding it up against the head tube bosses.

Be sure that the fork will not contact the rack during turns.



**Step 2:** Insert the four (4) bolts with locking washers into the appropriate mounting holes on the PorterRack.

Be sure to align the rack using the lowest mounting hole position to ensure proper fork clearance, as shown in step 4.




**Step 3:** Slide each M8 bolt through a spacer and thread it into its head tube boss a couple of turns while holding the PorterRack in place.

The brake, derailleur, and electric cables should be routed through the middle of the top and bottom mounting bolts.

**Note:** it may be helpful to have an assistant hold the PorterRack.



**Step 4:** Tighten all four bolts smoothly and evenly, alternating in a criss-cross pattern. Tighten them to 6-10 N-m

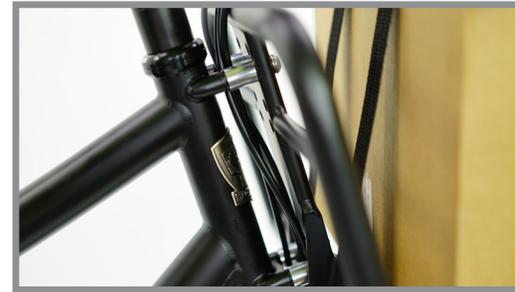

**Step 5:** Your PorterRack is now ready for use.

**!** WARNING: Before each ride, check tightness of all hardware - push and pull on all elements of your PorterRack to identify any loose hardware. Listen for rattles or feel for moving parts. PorterRack should not rattle, and all parts should be firm.

**!** WARNING: Your bike will handle differently when hauling cargo. Ride cautiously and never perform stunts (like riding without hands).

**!** WARNING: Always make sure your cargo is secured by straps rated over the weight of your cargo, and attach warning flags to any cargo extending behind or in front of your bike.

View the Xtracycle Owner's Manual at [xtracycle.com/support](http://xtracycle.com/support) for additional safety guidelines when riding with passengers or cargo.